


### 6.3 Starting a Granita machine 1 (granita/cooler)

The bowl of machines with a beverage cooling function is operated by means of an on/off switch plus a refrigeration switch, which must be positioned as follows:


Switch  in position "I": machine powered and mixer on.

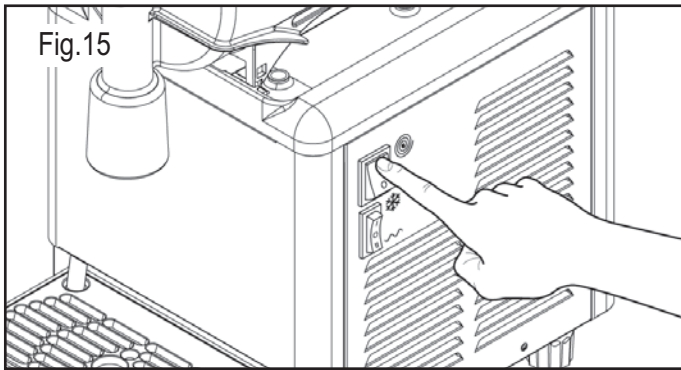


### 6.4 Starting a Granita machine 2 (granita only)

For the sake of simplicity only the operation of the right bowl will be illustrated; to operate the left bowl simply carry out the same sequence of steps on the switches of the left bowl.


Switch in position "I": machine powered.


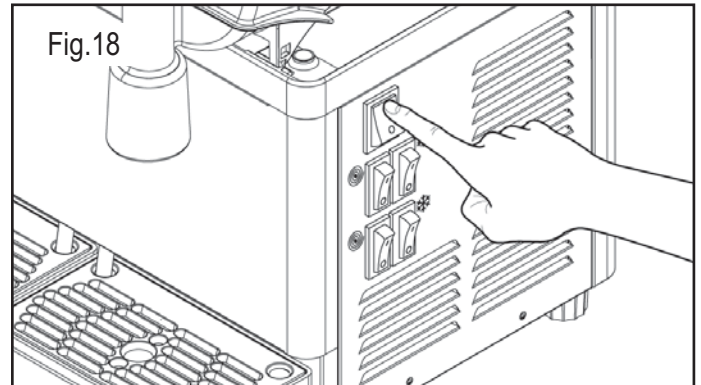


#### To dispense GRANITA:


Changeover switch : in position "I" refrigeration system on (freeze mode)


Each bowl is operated by two switches, which must be positioned as follows:



Switch  in position "I": mixer on.

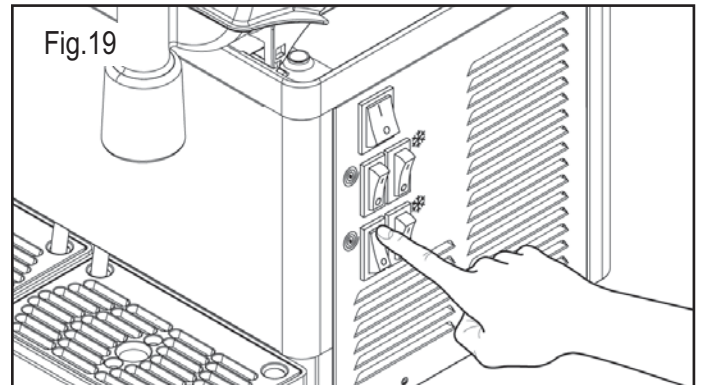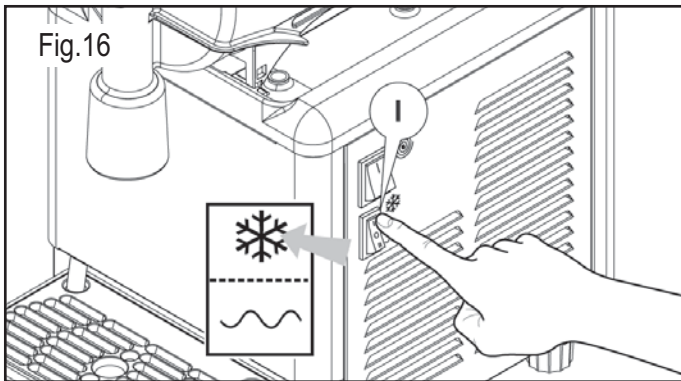


#### To dispense COLD DRINKS:

Changeover switch : in position "II" refrigeration system on (cooling mode).

Switch  in position "I": refrigeration system on.

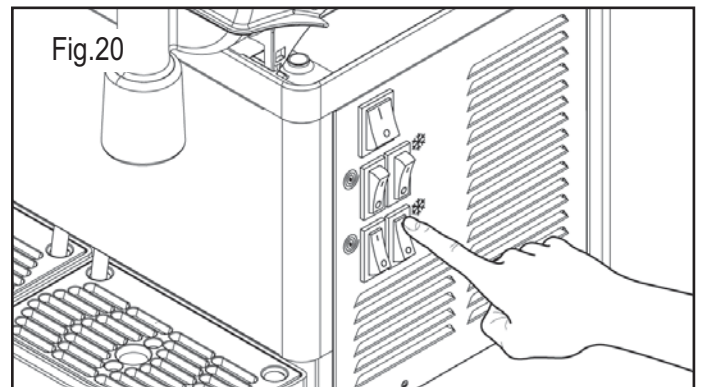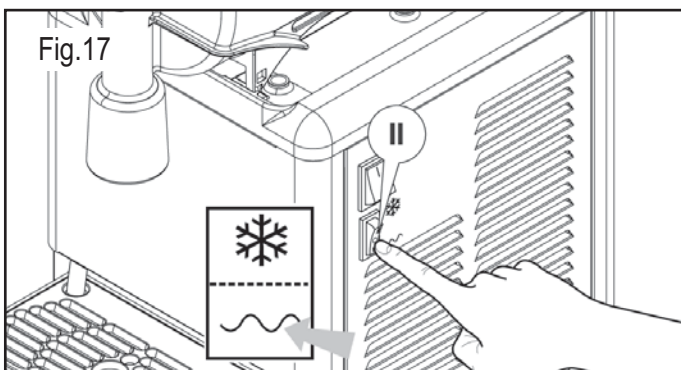

**Note:** The refrigeration system starts only if the switch  is in position "I" (mixer working)